

# Alpha Mi

## Alpha Survey USV

One-person-handle | Fully integrated | Detachable Propeller








## Alpha Mi USV for surveying

Alpha Mi is exclusively designed for one-person measuring work. Trimaran design ensures stable sailing and is used in conjunction with dual pump jet thruster, RTK, single beam, and HD image. Intelligent ship control are integrated for more convenient and high precision underwater measurement.





## Easy Work For Even One Person

The size of Alpha Mi is only  $900 \times 500 \times 340$  mm, the whole set of which can be carried by one single person without difficulty. The hull can be easily put into a car trunk. A single worker is able to quickly conduct his hydrographic survey as soon as the battery and the antennas are installed.















#### **Quick Preparation**

Configure or pack up in 1 minute.



#### **Long Working Time**

Maximum working time 5h. 2 batteries enough for 1 day job.



#### **Detachable Propeller**

Dual pump jet detachable propeller, easy to maintain. Maximum speed at 6 m/s, well perform on torrent.



#### **4G For Remote Control**

4G network brings unlimited control distance.



#### **Intelligent Obstacle Avoidance**

40-meter heading radar sensing, decelerating within 10 meters to avoid potential dangers in real time.



#### **Single Beam Bathymetry**

Built-in high-sensitivity depth echo sounder, sounding 0.2 meters the shallowest.



#### **Protection**

Streamline slope design at the back of the boat with blade-like filter and pump protect the vehicle from being entangled by aquatic plants.

## Detachable Propeller


When the propeller is entangled with fishing line and other debris, it does not need to be returned to the factory for repair. The operator can use the supporting tools to quickly disassemble it on site, eliminate the problem, and then continue working.







### Multi-functional Controller

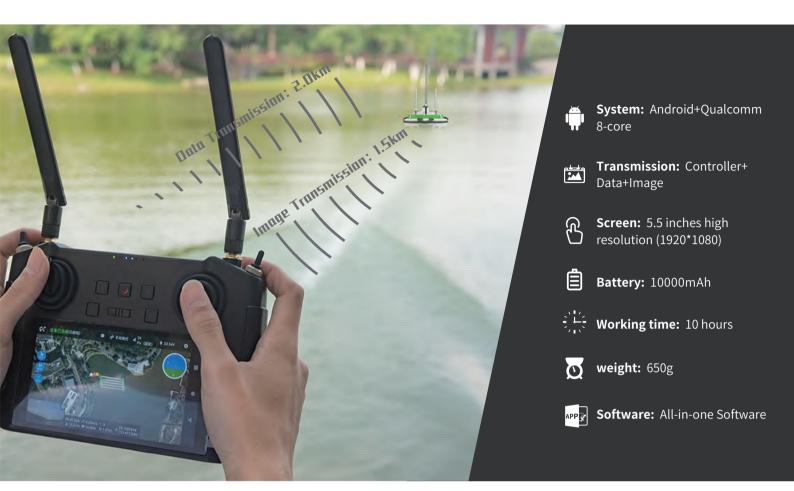

## All-in-One USV Control Software

The alpha software system is a software solution used for route planning, parameter setting, hull control, data display, status display and data export, etc. Customized maps and satellite image maps can be imported or downloaded when the network is working. The software system is able to automatically generate routes, execute navigation tasks, continue navigation task after breakout and finally return to the place of departure.



Storage Capacity Measurement




**Dock Channel Survey** 




Section Measurement



River Topography Survey



## Work Flow

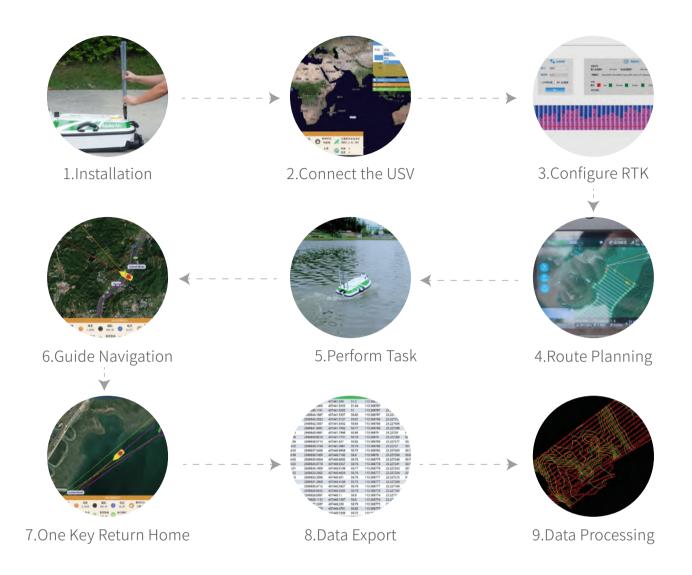

## Measurement Cases (Working Environments)



Yellow River



Yangtze River



Pearl River



Songhua River



Lake



Fishpond



**Inshore Waters** 



Dock

#### Professional Set



Hull	$\times 1$
Propeller	$\times 2$
Intelligent hull control	$\times 1$
Built-in RTK	$\times 1$
Built-in HD camera	$\times 1$
Built-in single-beam	$\times 1$
Dual rocker android remote controller	×1
High performance water-proof battery	×1
Battery Charger	$\times 1$
Communication antenna	$\times 2$
GNSS antenna	$\times 2$
Network antenna	$\times 1$
Radio antenna	$\times 1$
Carrying Case	$\times 1$
Life jacket	$\times 1$
Tool kit	$\times 1$
Instruction manual	$\times 1$

#### Technical Specification

•		
Physical	Dimension	900×500×340mm
	Material	Polymer material
	Design	M-type trimaran
	Weight	16kg
	Max Payload	20kg
	Anti Wind&Wave	Level 4
Echo Sounder	Range	0.2m-120m
	Accuracy	1cm±0.1%h(h is the meters of water depth)
	Resolution	1cm
	Beam angle	7.5°±0.5°
Obstacle	Video	1080HD
Avoidance	Millimeter Wave Radar	Optional
Power	Thruster	DC pumpjet thruster
	Propeller	3-piece aviation aluminum alloy paddle
	Protection	Double protection from aquatic plants
	Speed	Cruise 1.5m/s, maximum 6 m/s
	Battery	29.6V 888Wh
	Working time	4-5h(1.5m/s), customized 8-10h
	Battery Type	Detachable
	Satellite	GPS: L1C/A, L1C, L1P, L2C, L2P, L5、
		BDS: B1I, B2I, B3I, B1C, B2a,
		GLONASS: G1, G2, G3、 Galileo: E1, E5a, E5b、
Position And Orientation		QZSS: L1C/A, L1C, L2C, L5
	DTI	
	RTK	Built-in GNSS receiver
	RTK Accuracy	Horizontal: $\pm$ (8+1×10-6D) mm,
		Vertical:±(15+1×10-6D) mm
	Channel	1408
	Orientation —	Three-dimensional electronic compass
		Dual GNSS antenna
Communication	RTK	Built-in radio and 4G netwotk
	Video	5.8GHz
	Remote	5.8GHz
	Control Distance	Unlimited by network, 2km by radio (Typical Environment)

<sup>\*</sup>The above technical parameters are for your reference. The company reserves the right to change the design and planning of the product based on the actual product.

#### Alpha Surveying Technology Co.,Ltd.

NO.9 Caipin Road, Science City Huangpu District, Guangzhou

**\** +86-20-82108930

www.alpha-surveying.com